


		A	B	C	D	E	F
Ver.	No.	DESCRIPTION					DATE
X1		NEW SPEC					2017.11.17
A		MODIFY PRODUCT REV. TO 0A					2018.01.17
A1		CHANGE P/N: 875135A1000xx0HF TO 875135A100Axx0HF;REVISE CCC&PSB LOGO					2018.05.15
A2		CHANGE P/N :875135A100Axx0HF TO 875135A100Axx1HF; ADD WJ SPEC ; REMOVE MEXICO ENERGY NO.; MODIFY Product of China TO Made in China;REMOVE CPT NAME;ADD BIS WEBSITE					2018.09.04
A3		CHANGE P/N :875135A100Axx1HF TO 875135A100Axx2HF; REVISE FONT COLOR TO Gray Pantone 421C;REMOVE 吳江九龍廠SPEC; ADD Ukraine LOGO;REVISE TUV-GS ID					2020.01.06
A4		CHANGE P/N :875135A100Axx2HF TO 875135A000Bxx0HF; UPDATE PRODUCT REV TO 0B;REVISE QR CDOE 容錯 率為15%以上;REVISE PRINT REV 0B LOCATION;ADD RCM ID;REMOVE “I.T.E.”FORM UL LOGO;REVISE LABEL SIZE;ADD CHILE & UKCA LOGO;ADD UK ADDRESS					2020.08.04
A5		CHANGE P/N :875135A000Bxx0HF TO 875135A000Bxx1HF; REVISE QR CDOE TO 2D DATA MATRIX					2020.08.06
Part no.:		UP/N:		File Name:			Sheet : 1 / 2 Size :A4
875135A000Bxx1HF		A135A012P		LABEL_A135A012P-HW01_A5			
							F DOC NO. Form113 Rev. 1

規範:

- 1.材質:50#白色特多龍
- 2.背膠: 壓克力膠
- 3.黏著力: >0.8 kgf/inch
- 4.黑底灰字 Gray Pantone 421C
- 5.表面處理:20# OPP(霧)
- 6.黏貼適合材質:Plastic(PC)
- 7.溫度測試:-20 To 100 Degree C
- 8.條碼字體部分Width 100% 不可拉伸或壓縮,條碼居中對齊
- 9.標籤系統需符合UL or CSA規範
Labeling System (Pressure-Sensitive System)
UL Recognized Label or CSA Certified Label
- 10.BARCODE TYPE:2D DATA MATRIX
條碼掃描等級在D級以上

CT: CAAAARRSSWWXXX 0B

CPT Product Rev.



條碼掃出為CAAAARRSSWWXXX共14碼

條碼文字顯示為CT:△CAAAARRSSWWXXX共18碼

條碼文字顯示為0B(2 codes),與CT barcode間距3個空格

CT : COMMODITY TRACKING LABEL DESIGNATOR

C : COMMODITY CODE:固定碼, 打印W

AAAA : ASSEMBLY CODE,固定碼, HP 機種代碼打印: HAQV

RR : REVISION LEVEL,產品版本: 0B

SS : SUPPLIER/SITE OF MFG, 供應商代碼:吳江:HH/L9/M3/PS/43/9N/CT/DQ

WW: WEEK/YEAR OF MFG, 當年度的周別碼, 要參照HP week code spec

XXX : UNINIQUE SEQUENCE IDENTIFIER, 流水碼

流水碼在同一週內一個循環後(即第一碼至最後一碼), 再變換使用第二個供應商代碼

流水碼的部份採用36進制

*UNINIQUE SEQUENCE IDENTIFIER RULES-Alphanumeric,

Base on 36

掃出條碼時, 不可出現"CT:"

條碼字型:Arial

字體大小:1.00 mm

BARCODE文字下方若有△代表空一格




CT BARCODE & DATE CODE 由廠內自印

"此部品中必須符合I-QRA-05-019文件規格要求"

"This part should follow which are specified in I-QRA-05-019"

"此部件中不能使用含有HPT-01-043指定物質的材料"

"This part should not contain any substances which are specified in HPT-01-043"

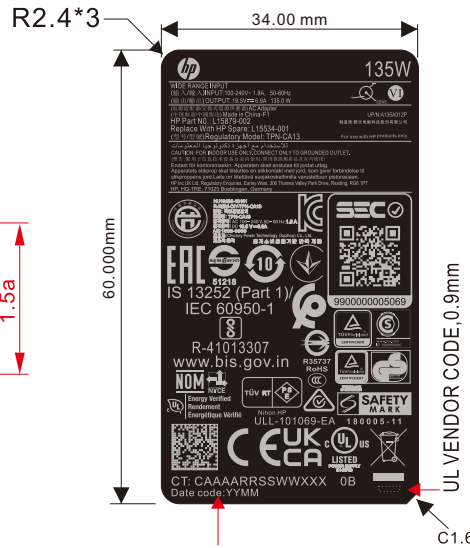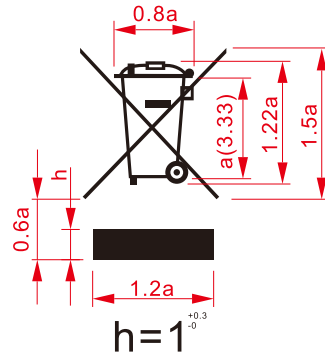

Date code:YYMM (廠內自印)


YYMM :西元年後2碼+月份

ex:2018/11 = 1811, 2019/01 = 1901...

Text scale:4 pt.




"Date code:"字樣由廠商打印

- 300 DPI printer minimum.Must meet the contrast and print growth requirements per ISO/IEC16022 and have a print quality
- 24*24 row/column(0.254*24=6.096mm) Datamatrix ECC200 symbol per ISO/IEC 16022 Data Matrix Specification
- 10 mil cell dimension(0.010*25.4=0.254mm)

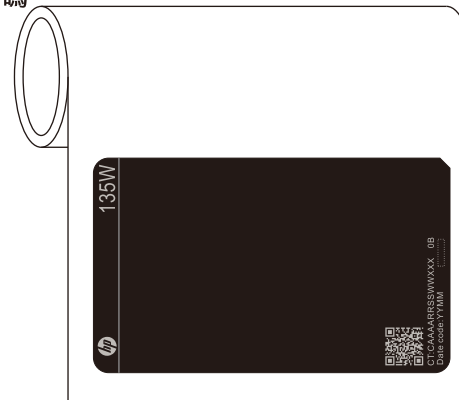

示意圖

- ☐ SAMPLE APPROVED CARD
- ☒ NON SAMPLE APPROVED CARD
- ☐ 自動貼
- ☒ 手貼



吳江廠圖面

PRODUCT REV .0B

Tol. : +0/-0.2	Part no. : 875135A000Bxx1HF
Unit : mm	Scale : 1 / 1
Material : See Note	UPN : A135A012P
File Name : LABEL_A135A012P-HW01_A5	
Drawn : Zengdi_Li	Size :A4 Sheet : 2 / 2 Ver. A
Checked : Brandon_Lo	
Approved : Sam_Lee	

Chicony
POWER TECHNOLOGY